


LC Battle Panels




LC Battle Panels

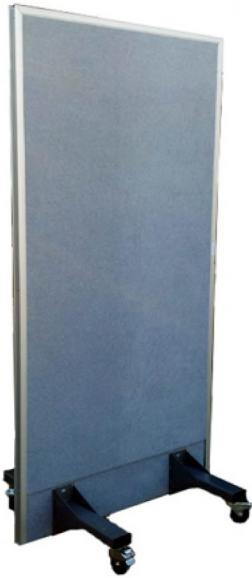

- Portable
- "Total lock" casters
- Bullet resistant up to UL 8
- Upholstered tackable surface
- Anodized aluminum frame accepts connector hardware

LC Enterprises can manufacture the LC Battle Panel to suit your needs. Multiple styles are available. Overall thickness will vary with the design, but figure 400-500 pounds each, and 2.25" thick at the frame.

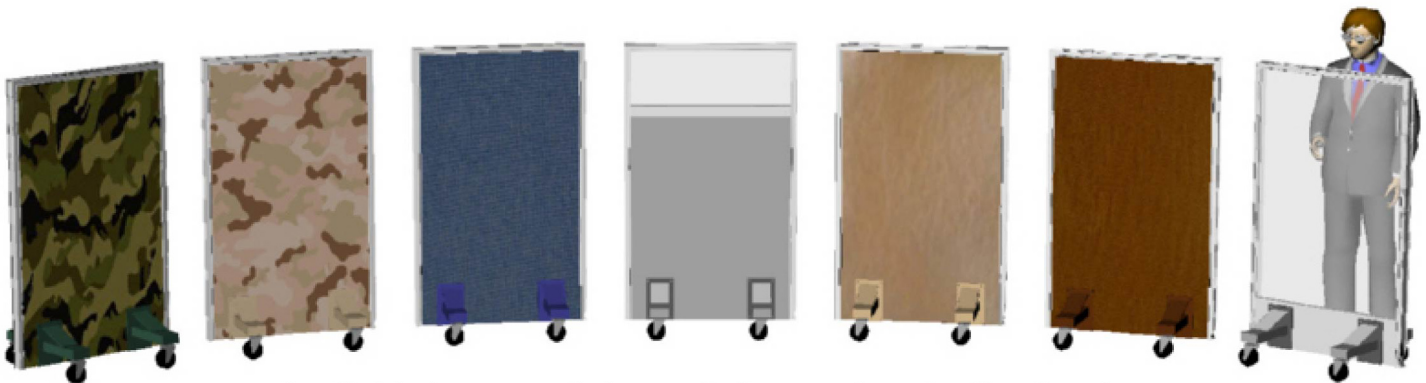

Available in many styles and sizes and protection levels
Let us know your needs

LC Enterprises, 363 W 3rd St. Perris CA 92570
<http://www.lcenterprises.com>
sales@lcenterprises.com
951 940 6068 office, 951 657 0180 facsimile

LC Battle Panels

WEAPONS			SPECS			LEVELS			BULLETS			NUMBER OF SHOTS
WEAPON	TYPE	CALIBER (mm)	CLASS	STANAG	UL	NU	CEN	MASS (g)	MATERIAL	VELOCITY		
	.38 Special	9 x 19	Handgun	-	1	IIIIA	-	8.00	ICCI	338 M/S	5	
	.357 Magnum	9 x 33	Handgun	-	2	IIIIA	81 & 83	10.20	JSP	430 M/S	5	
	.44 Magnum	11 x 33	Handgun	-	3	IIIIA	84	15.60	LWC	440 M/S	5	
	MPS	9 x 19	SMG	-	6	IIIIA	82	8.00	ICCI	427 M/S	5	
	Shotgun	12 Gauge	Shotgun	-	3 & 4	IIIIA	5G2	28.30	SLUG	503 M/S	3	
	Tekover	7.62 x 25	Handgun	-	-	IIIIA	-	5.50	ICSI	488 M/S	5	
	Kolchakov (LC-47)	7.62 x 39	Assault Rifle	-	-	IIII	85	9.70	SCCI	732 M/S	5	
	Kolchakov (LC-47 Wilson)	7.62 x 39 AP1 82	Assault Rifle	II	-	-	85+	11.70	SCCI	719 M/S	5	
	M16/A1-15	5.56 x 45 NATO S&W	Assault Rifle	I	7	IV	85	4.00	SCCI ICCI	900 M/S 833 M/S	3	
	Winchester 308	7.62 x 51	Rifle	I	7	III	86	10.90	ICCI	810 M/S	5	
	Remington 700 SPS	7.62 x 63 AP (30 06) 7.62 x 51 AP (MC 06)	High-Power Rifle	III	5 & 8	IV	87-	10.80 8.40	AP	859 M/S 930 M/S	5	
	Dragunov	7.62 x 54R B32 AP	Sniper Rifle	III	-	IV+	87+	10.04	SCCI	854 M/S	1	
	50 Cal	12.7 x 99	High-Power Rifle	IV	10	-	-	45.00	C	938 M/S	1	

LC Battle Panels

US Underwriters Laboratory, 752
NIJ National Institute of Justice, 01108.01
CEN European Standard
STANAG ... NATO's Standard (STANAG 4569)
ALPHI ... Alpine Armoring's Certified Standard

ICCI Lead Core Copper Jacket
JSP Jacketed Soft Point
LWC Lead Wad Cutter
ICSI Lead Core Steel Jacket
SCCI Steel Core Copper Jacket
AP Armor Piercing
5G Shotgun

Shots (S) 11.4 cm Square Pattern
 (Corners & Center)
Shots (3) 11.4 cm Triangular Pattern
Velocity Minimum Measured Velocity
MU Rating .. Levels I, II, IIIA, & IIIA (based on 1st
 2 required calibers of ballistic threat)

LC Battle Panels